

PTWA-003WU SERIES

3W Wall Mount Power Supply for I.T. Equipment



- Input Voltage 100 to 240 VAC, 50 to 60Hz
- US type, 2 Prong Plug-In
- Constant Voltage
- Single Output
- Light Weight and Compact Size
- Class II Insulation (Double Insulation)

1 Year Warranty

Approvals:

Single Output

Product Number	Output Voltage	Max. Output Current	Output Regulation	Maximum Output Power
PTWA-003WU-xxxxxyy	4.2 ~ 12 VDC		5%	3W

Electrical Characteristics

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Input Voltage	Operating Voltage	100		240	VAC
Input Frequency		50		60	Hz
Output Power Range		0		3	W
Hold-up time	Full load at 115 VAC		8		ms
Voltage Regulation	At constant voltage mode		±5		%
Current Limit	At constant current mode		±5		%
Efficiency	Io=Full Load, 115 VAC (DC Conversion)	60.2			%
Protection	Over voltage protection (OVP), AC recycle; Short circuit protection; Output short circuit protection				
Automatic Recovery	Automatic recovery when removal of protect condition. Any protect condition shall cause no damage and no component fail. (<0.03 ohm)				


Conditions

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Operating Temperature	Ambient	0		40	°C
Storage Temperature	Ambient	-10		70	°C
Operating Relative Humidity		8		90	%
Storage Relative Humidity		5		95	%
Mean Time Between Failures	Full load, 240VAC, 25°C	50			K Hours

Approvals and Compliance

Parameter	Test Conditions
Hi-Pot Test	Primary to secondary: 4242VDC for 1 min
Hi-Pot Test	Primary to case: 4242VDC for 1 min
Insulation Resistance	Input to output: >10M ohm @ 500VDC
EMI	FCC Class B, CISPR22 Class B, EN55022 Class B
Safety Description	UL/c-UL, FCC, CE, EMC&LVD, EN60950, UL60950, GB4943-2001, EN60335
Environmental Compliance	RoHS, Energy Star, CEC IV

Mechanical and PIN out

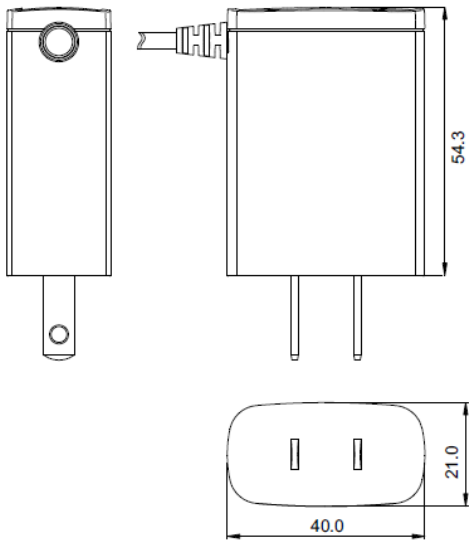

Note:

1. Dimensions are shown in mm.
2. Weight: 80g approx.
3. Optional output connector.