

SAWA26 SERIES



5 Year Warranty

25W Wall-Mount Power Supply for Industrial Equipment

- Wide Operating Voltage 80 to 275 VAC, 47 to 63Hz
- Interchangeable Plug
- Optional Output Connector(See appendix)
- Single Output
- Energy Efficiency DoE VI
- **Wide Operating temperature from -40 °C to 70 °C**

Approvals: **CBC** **CE** **RoHS**

Single Output

Model Number	Output Voltage	Max. Output Current	Total Regulation	Max Output Power
SAWA26-S02	5 ~ 5.99 VDC	3.30 ~ 2.75 A	±5%	16.5W
SAWA26-S03	6.5 ~ 8.0 VDC	3.07 ~ 2.50 A	±5%	20W
SAWA26-S04	8.0 ~ 11 VDC	2.75 ~ 2.00 A	±5%	22W
SAWA26-S05	11 ~ 13 VDC	2.27 ~ 1.92 A	±5%	25W
SAWA26-S06	13 ~ 16 VDC	1.92 ~ 1.56 A	±5%	25W
SAWA26-S07	16 ~ 21 VDC	1.56 ~ 1.19 A	±5%	25W
SAWA26-S08	21 ~ 27 VDC	1.19 ~ 0.92 A	±3%	25W
SAWA26-S09	27 ~ 33 VDC	0.92 ~ 0.75 A	±3%	25W
SAWA26-S10	33 ~ 40 VDC	0.75 ~ 0.62 A	±3%	25W
SAWA26-S11	40 ~ 48 VDC	0.62 ~ 0.53 A	±3%	25W

SAWA26-S02~S09 are required to use AWG#18X2C/4FT output cable.

SAWA26-S10~S11 are required to use AWG#20X2C/4FT output cable.

The regulation and efficiency will be changed by modified output cable


Electrical Characteristics

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Safety Approvals Input Voltage Range	Safety Approval & Specification in Label	100		240	VAC
Operate Voltage Range	Derate linearly from 100% load at 90VAC to 80% load at 80VAC	80		275	VAC
Input Frequency	Sine wave	47		63	Hz
Output Power Range	See Rating Chart			25	W
Low Line Input Current	Full load, Vin=100VAC		0.55		A
High Line Input Current	Full load, Vin=240VAC		0.22		A
Low Line Input Inrush Current	Full load, 25°C, Cool start, Vin=100VAC			25	A
High Line Input Inrush Current	Full load, 25°C, Cool start, Vin=240VAC			60	A
Safety Ground Leakage Current	Vin=240VAC, Fi=60Hz			0.25	mA
Efficiency	Full Load, Vin=230VAC	82		88	%
Line Regulation	Full Load, Vin=100~120VAC	0.5		1	%
Load Regulation	Vin=230VAC, 10~90% Load Change at Condition	3		5	%
Over Load Protection	Nil. But, Output protected to short circuit conditions				
Time of Transient Response	Io=Full Load to Half Load, Vin=110VAC			4	ms
Hold-Up Time	Full Load, Vin=100VAC			12	ms
Start Up Time	Full Load, Vin=100~240VAC			3	s
Ripple & Noise (Peak to Peak)				1	%
Temperature Coefficient	Full Load, Vin=100~240VAC			±0.04	%/°C
Dielectric Withstanding Voltage(P-S)	Primary to Secondary			4242	VDC
EMC Emission	Compliance to EN55022(CISPR22)			B	Class

Environmental

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Operating Temperature	Derate linearly from 100% load at 40 to 50% load at 70	-40		70	°C
Storage Temperature	10~95% RH	-40		85	°C
Operating Humidity	non-condensing	0		95%	RH
Storage Humidity		0		95%	RH
Electro Static Discharge	Air Discharge, IEC61000-4-2			8	KV
Electro Static Discharge	Contact Discharge, IEC61000-4-2			4	KV
Mean Time Between Failure	Operation Temperature at 25 , Calculated per MIL-HDBK-217F	100K			h
Operating Altitude (Elevation)	All Condition			3000	m
Vibration	10~500Hz,10min./1cycle, 60min.each along X, Y, Z axes			5	G
Surge Voltage	Line-Neutral			1	KV
Surge Voltage	Line-PE & Neutral-PE			2	KV


Mechanical Diagram and Technical Chart

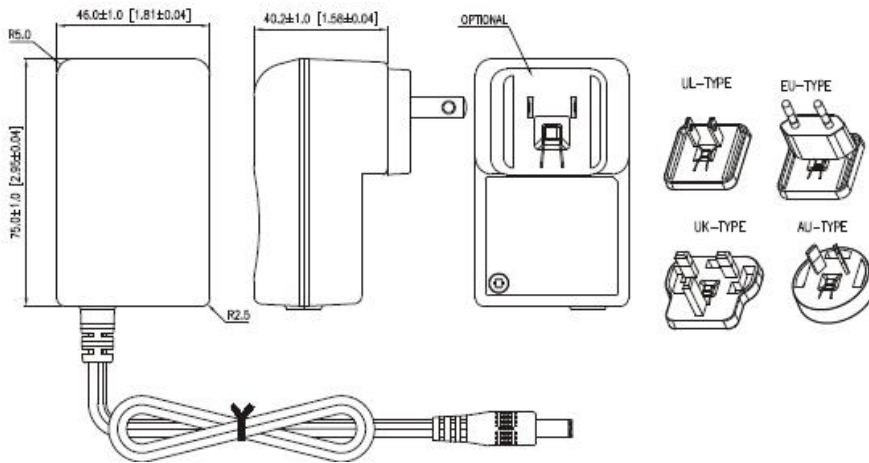

Note:

1. Dimensions are shown in mm & inch
2. Weight: approx. 200gs approx.
3. Optional output connector:

Derating Chart

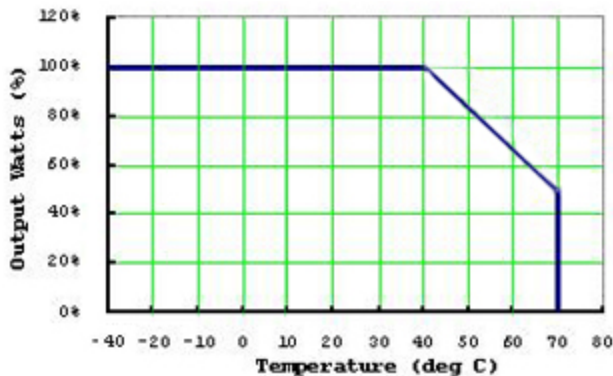

1. Operating Temperature: -40 to 70°C
2. Derate linearly from 100% load at 40°C to 50% load at 70°C