

**SIWA11 SERIES**

**10W Wall Mount Power Adapter for Industrial Equipment**



- Wide Input Voltage 90 to 264 VAC, 47 to 63Hz
- **2 Prong European Plug-In Mains Connector**
- Output Voltage Available From 5VDC Thru 40VDC
- Single Output, Class II Insulation, Optional Output Connector
- **Operating Temperature: -20 ~ 70°C**
- CEC Level V, Energy Star 2.0 and RoHS Compliance

**5 Year Warranty**

Approvals:

**Single Output**

Product Number	Output Voltage	Max. Output Current	Total Regulation	Maximum Output Power
SIWA11-S02	5 ~ 6 VDC	1.60 ~ 1.33 A	5%	8W
SIWA11-S03	6 ~ 8 VDC	1.33 ~ 1.00 A	5%	8W
SIWA11-S04	8 ~ 11 VDC	1.25 ~ 0.91 A	5%	10W
SIWA11-S05	11 ~ 13 VDC	0.91 ~ 0.77 A	5%	10W
SIWA11-S06	13 ~ 16 VDC	0.77 ~ 0.63 A	5%	10W
SIWA11-S07	16 ~ 21 VDC	0.63 ~ 0.48 A	3%	10W
SIWA11-S08	21 ~ 27 VDC	0.48 ~ 0.37 A	3%	10W
SIWA11-S09	27 ~ 33 VDC	0.37 ~ 0.30 A	3%	10W
SIWA11-S10	33 ~ 40 VDC	0.30 ~ 0.25 A	3%	10W

**The total regulation on model S02-S05 is required to use AWG#20/4FT output cable.**  
**The total regulation on model S06-S10 is required to use AWG#24/4FT output cable.**  
**The regulation and efficiency will be changed by modified output cable.**

**Electrical Characteristics**

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Input Voltage	Operating Voltage	90		264	VAC
Input Frequency		47		63	Hz
Output Power Range	Vin=90 to 264VAC	0		10	W
Input Current (Low Line)	Io=Full load, Vin=115VAC			0.3	A
Input Current (High Line)	Io=Full load, Vin=230VAC			0.2	A
Low Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=115VAC		20	30	A
High Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=230VAC		45	60	A
Efficiency	Io=Full Load, Vin=230VAC	75	80	85	%
Line Regulation	Io=Full Load		0.5	1	%
Load Regulation	Vin=230VAC		3	5	%
Over Voltage Protection			Nil		%
Over Current Protection	Nil But, Output protected to short circuit conditions				%
Transient Response	Io=Full Load to Half Load, Vin=100VAC			4	mS
Hold-Up Time	Io=Full Load, Vin=110VAC	5	10		mS
Start Up Time	Io=Full Load, Vin=100VAC	0.3	1	2	S
* Ripple & Noise (Peak to Peak)	Full Load, Vin=90VAC		0.5	1	%
Safety Ground Leakage Current	Io=Full Load, Vin=240VAC		0.2	0.25	mA
Temperature Coefficient	All output	-0.04		0.04	%/°C

### Conditions


Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Operating Temperature		-20		70	°C
Storage Temperature		-40		85	°C
Relative Humidity	No-Condensing	5		95	%
Operating Temperature at 25°C, Calculated per MIL-HDBK-217F		0.1			M Hrs

De-rate linearly from 100% load at 40°C to 50% load at 70°C

### Approvals and Compliance

Parameter	Test Conditions	Min.	Unit
Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	4242	VDC
EMI requirements for CISPR-22	Vin=220VAC	B	CLASS
EMI requirements for FCC PART-15	Vin=110VAC	B	CLASS
Environmental Compliance	Energy Star 2.0, CEC Level V, RoHS		

### Mechanical and PIN out

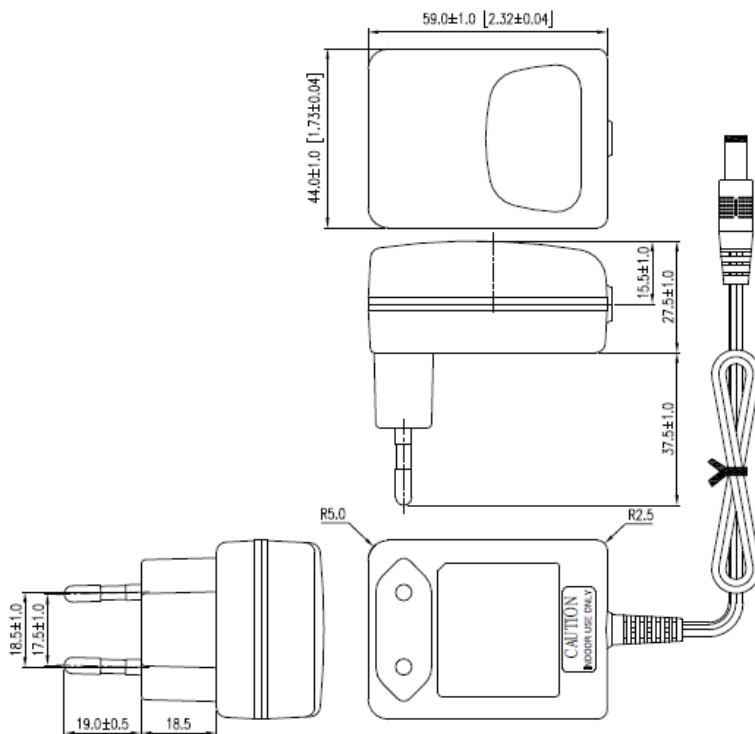

**Note:**

1. Dimensions are shown in mm.
2. Weight: 90gs approx.
3. Optional output connector.