

SMDA50 SERIES

50W Desktop for Medical Equipment

- Wide Input Voltage 90 to 264 VAC, 47 to 63Hz
- IEC-320-C14 input inlet and optional AC cords (EU, UK, US, Japan types)
- Output Voltage Available From 2VDC Thru 50VDC, Single to Triple Output
- Input Surge Current, Over Voltage, Output Voltage, and Over Load Protection.
- Splash Proof, Class I Insulation

5 Year Warranty

Approvals:

Single Output

| Model Number | Output Voltage | Max. Output Current | Total Regulation | Max. Output Power |
|--------------|----------------|---------------------|------------------|-------------------|
| SMDA50-S00 | 2 ~ 3 VDC | 12.0 ~ 10.0 A | 7% | 30W |
| SMDA50-S01 | 3 ~ 5 VDC | 10.0 ~ 8.00 A | 5% | 40W |
| SMDA50-S02 | 5 ~ 6 VDC | 8.00 ~ 6.66 A | 5% | 40W |
| SMDA50-S03 | 6 ~ 8 VDC | 7.00 ~ 5.25 A | 5% | 42W |
| SMDA50-S04 | 8 ~ 11 VDC | 5.63 ~ 4.00 A | 4% | 45W |
| SMDA50-S05 | 11 ~ 13 VDC | 4.00 ~ 3.46 A | 3% | 45W |
| SMDA50-S06 | 13 ~ 16 VDC | 3.46 ~ 2.81 A | 3% | 45W |
| SMDA50-S07 | 16 ~ 21 VDC | 3.12 ~ 2.38 A | 3% | 50W |
| SMDA50-S08 | 21 ~ 27 VDC | 2.30 ~ 1.85 A | 2% | 50W |
| SMDA50-S09 | 27 ~ 33 VDC | 1.85 ~ 1.51 A | 2% | 50W |
| SMDA50-S10 | 33 ~ 40 VDC | 1.51 ~ 1.25 A | 2% | 50W |
| SMDA50-S11 | 40 ~ 50 VDC | 1.25 ~ 1.00 A | 2% | 50W |

Multi Output

| Part Number | Output 1 | | | | Output 2 | | | | Output 3 | | | | Max. Output Power |
|-------------|----------|-------|-------|--------|----------|-------|-------|--------|----------|-------|-------|--------|-------------------|
| | Vonom | Iomin | Iomax | Regmax | Vonom | Iomin | Iomax | Regmax | Vonom | Iomin | Iomax | Regmax | |
| SMDA50-D00 | +3.3V | 0.5A | 5A | 7% | +12V | 0.2A | 2A | 5% | | | | | 40W |
| SMDA50-D01 | +5V | 0.5A | 5A | 5% | +12V | 0.2A | 2A | 5% | | | | | 42W |
| SMDA50-D02 | +5V | 0.5A | 5A | 5% | +15V | 0.15A | 1.5A | 5% | | | | | 42W |
| SMDA50-D03 | +5V | 0.5A | 5A | 5% | +24V | 0.1A | 1A | 5% | | | | | 42W |
| SMDA50-D04 | +3.3V | 0.5A | 5A | 7% | +5V | 0.2A | 2A | 5% | | | | | 26.5W |
| SMDA50-D09 | +12V | 0.3A | 3A | 5% | | | | | -12V | 0A | 1A | 5% | 42W |
| SMDA50-D10 | +15V | 0.2A | 2A | 5% | | | | | -15V | 0.1A | 1A | 5% | 42W |
| SMDA50-D15 | +5V | 0.5A | 5A | 5% | | | | | -24V | 0.1A | 1A | 5% | 42W |
| SMDA50-D16 | +5.1V | 0.5A | 5A | 5% | +7.2V | 0.3A | 2.6A | 5% | | | | | 42W |
| SMDA50-D17 | +10.5V | 0.2A | 2A | 5% | | | | | -10.5V | 0A | 2A | 5% | 42W |
| SMDA50-D18 | +5V | 0.5A | 5A | 5% | | | | | -5V | 0A | 2A | 5% | 35W |
| SMDA50-T00 | +3.3V | 0.5A | 5A | 7% | +12V | 0.4A | 2A | 5% | -12V | 0.1A | 0.8A | 5% | 42W |
| SMDA50-T01 | +5V | 0.5A | 5A | 5% | +12V | 0.2A | 2A | 5% | -5V | 0A | 0.8A | 5% | 42W |
| SMDA50-T02 | +5V | 0.5A | 5A | 5% | +12V | 0.2A | 2A | 5% | -12V | 0.1A | 0.8A | 5% | 42W |
| SMDA50-T03 | +5V | 0.5A | 5A | 5% | +15V | 0.4A | 2A | 6% | -15V | 0.1A | 0.8A | 5% | 42W |
| SMDA50-T04 | +5V | 0.5A | 5A | 5% | +24V | 0.2A | 1A | 5% | -24V | 0A | 0.5A | 5% | 42W |
| SMDA50-T05 | +5V | 0.5A | 5A | 5% | +24V | 0.1A | 1A | 5% | -12V | 0A | 0.8A | 5% | 42W |
| SMDA50-T06 | +3.3V | 0.5A | 5A | 7% | +12V | 0.4A | 2A | 5% | -5V | 0.1A | 0.8A | 5% | 42W |

Conditions

| Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|---|-----------------|------|------|------|-------|
| Operating Temperature | | 0 | | 70 | °C |
| Storage Temperature | | -40 | | 85 | °C |
| Relative Humidity | | 5 | | 95 | % |
| Operating Temperature at 25°C, Calculated per MIL-HDBK-217F | | 0.1 | | | M Hrs |

De-rate linearly from 100% load at 50°C to 50% load at 70°C


Electrical Characteristics

| Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|---------------------------------|---|-------|------|------|------|
| Input Voltage | Operating Voltage | 90 | | 264 | VAC |
| Input Frequency | | 47 | | 63 | Hz |
| Output Power Range | Vin= 90 to 264 VAC | 0 | | 50 | W |
| Input Current (Low Line) | Io=Full load, Vin=115 VAC | | | 1.35 | A |
| Input Current (High Line) | Io=Full load, Vin= 230 VAC | | | 0.7 | A |
| Low Line Inrush Current | Io=Full load, 25°C, Cool start, Vin=115VAC | | 12 | 15 | A |
| High Line Inrush Current | Io=Full load, 25°C, Cool start, Vin=230 VAC | | 26 | 30 | A |
| Efficiency | Io=Full Load, Vin=230VAC | 75 | 83 | 88 | % |
| Line Regulation | Io=Full Load | | 0.5 | 1 | % |
| Load Regulation | Vin=230VAC | | 3 | 7 | % |
| Over Voltage Protection | | 112 | | 132 | % |
| Over Current Protection | | 110 | | 150 | % |
| Transient Response | Io=Full Load to Half Load, Vin=100VAC | | | 4 | mS |
| Hold-Up Time | Io=Full Load, Vin=110VAC | 16 | | | mS |
| Start Up Time | Io=Full Load, Vin=100VAC | 0.3 | 1.5 | 2 | S |
| * Ripple & Noise (Peak to Peak) | Full Load, Vin=90VAC | | 0.5 | 1 | % |
| Safety Ground Leakage Current | Io= Full Load, Vin=240VAC | | | 0.1 | mA |
| Temperature Coefficient | All output | -0.04 | | 0.04 | %/°C |

Approvals and Compliance

| Parameter | Test Conditions | Min. | Unit |
|--|-------------------------------------|------|-------|
| Dielectric Withstanding Voltage for Primary to secondary | Primary to secondary | 5600 | VDC |
| Dielectric Withstanding Voltage for Primary to Ground | Primary to ground | 2800 | VDC |
| Isolation Resistance | Test Voltage = 2100VDC | 50 | MΩ |
| EMI requirements for CISPR-11 | Vin=220VAC | B | CLASS |
| EMI requirements for FCC PART-18 | Vin=110VAC | B | CLASS |
| Safety UL/c-UL, TUV/T-mark, CE, TUV-PSE | UL 60601-1, EN 60601-1, IEC 60601-1 | n/a | n/a |

Mechanical and PIN out

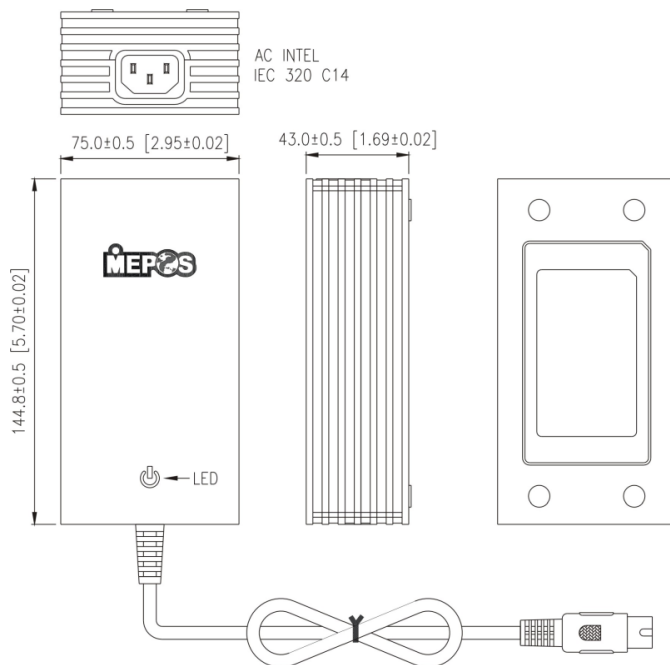

1. Dimensions are shown in inches or mm.
2. Weight: 510-560gs approx.
3. Optional output connector